

09-27-00

Express Mail Label No. EL696105196US

Date of Deposit: September 28, 2000

A

SAW:DHB:avs 09/26/00 3382-55826 18992.doc

PATENT

Attorney Reference Number 3382-55826

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Box PATENT APPLICATION
TO THE COMMISSIONER FOR PATENTS
Washington, D.C. 20231

JC917 U.S. PTO
09/670246
09/26/00

Transmitted herewith for filing is the patent application of:

Inventor(s): Sujal Parikh, Grzegorz Zygmunt, and Michel Suignard

For: TABLE MEASUREMENT FOR VERTICAL TEXT

Enclosed are:

- ☒ 26 pages of specification, 14 pages of claims, an abstract and an unsigned Combined Declaration and Power of Attorney.
- ☒ 10 sheet(s) of formal drawings.

FILING FEE					
For	Claims Filed	Number Free	Number Extra	Rate	Basic Fee \$690.00
Total Claims	32	20	= 12	\$18.00	\$ 216.00
Independent Claims	9	3	= 6	\$78.00	\$ 468.00
TOTAL FILING FEE					\$1374.00

- ☒ Please return the enclosed postcard to confirm that the items listed above have been received.

Respectfully submitted,

KLARQUIST SPARKMAN CAMPBELL
LEIGH & WHINSTON, LLP

By

Stephen A. Wight

Registration No. 37,759

One World Trade Center, Suite 1600
121 S.W. Salmon Street
Portland, Oregon 97204
Telephone: (503) 226-7391
Facsimile: (503) 228-9446

cc: Docketing
Patent Group Docketing Dept. (147849.1)

JC929 U.S. PTO
09/26/00

09670246 092600

AUTOMATIC LAYOUT OF VERTICAL FLOW ORIENTED CHARACTERS WITHIN A DEFINED AREA

5

TECHNICAL FIELD

This invention relates to the layout of vertical flow oriented characters within a defined area.

BACKGROUND AND SUMMARY

10 The Microsoft Internet Explorer web browser includes an HTML engine that draws or renders a web page on a computer display based upon a hyper-text markup language (HTML) file and other included resources that define the web page. Among other elements, these web pages can contain tables that are automatically sized to the available display area.

15 In auto-sizing HTML table elements, the HTML engine calls a table sizing method (TSM) that determines the table's dimensions and renders the table in the display. The HTML engine gives the TSM an area in which the table may be rendered. The TSM must determine a width for each column in the table so that all columns will fit within the designated area. However, each table cell within a column may have a range of acceptable widths. In Figure 1, the range
20 of acceptable widths for each table cell begins at a minimum acceptable width 101 and ends at a maximum acceptable width 151.

The TSM requests a minimum and maximum acceptable width for each table cell from a table cell sizing method (TCSM). The TCSM determines the maximum acceptable cell width by flowing the text and graphical content into
25 the table cell with the width set at infinity 101. In horizontal character flow table cells, the width is used by the TCSM to determine how far to let

characters flow horizontally from left to right before starting the next horizontal line. With the table cell width set at infinity, each paragraph in the cell is flowed into a separate horizontal line 152. Accordingly, the table cell maximum acceptable width is generally defined as the width 151 of the longest paragraph when each word of that paragraph is placed in one horizontal line 152.

The TCSM next determines the minimum acceptable cell width by flowing the characters into a cell with the width set to zero 100. At zero width, each word in the cell content is forced onto a separate horizontal line 104. This creates a horizontal line for each word in the cell content. The table cell minimum acceptable width is generally defined as the width of the longest word 102.

Based on these determined minimum 101 and maximum 151 acceptable widths for each individual cell within a column, the TSM will be able to propose a width for that column. The TSM then asks the TCSM to render each table cell within the column at the proposed width (P) 171. The TCSM flows the content into the table cell at the proposed width P 171. The TCSM then measures the resulting height (H) 181 and width (W) 180 of the cell.

A problem arises with this prior table sizing solution, because some foreign languages have vertical character flow instead of horizontal character flow. The existing table cell methodology which was designed for horizontal text 103 does not adequately handle vertical character flow.

In Figure 1a, table cells with the vertical character flow property, flow from top to bottom 21, instead of from left to right. Therefore, the computation of minimum and maximum acceptable cell widths as performed by the TCSM is incorrect.

Specifically, upon the advent of table cells with the vertical character flow property, the table cells now flow from top to bottom instead of from left

to right. Therefore the width input measurements (i.e., infinity, zero, and P) used by the TCSM to control how far table cells flow in the horizontal 'width' direction no longer make sense. Table cells with the vertical character flow property need to know how far to flow characters in the vertical character flow direction 21. Again, vertical table cells need to know the distance to flow characters in the vertical direction.

When the TSM asks the TCSM for minimum and maximum acceptable cell widths for a table cell with the vertical character flow property, the measurements returned by the TCSM are wrong. First, in Figure 1a, when computing a maximum acceptable table cell width with the existing methodology, the TSM calls the TCSM with the width at infinity. The vertical table cell interprets this as a request to vertically flow the table cell for a character flow distance(CFD) 22 equal to infinity. Since the character flow direction 21 is vertical, each paragraph in the content is flowed into a single vertically line. This creates a smaller table cell width 19, not the desired maximum acceptable table cell width.

Second, when computing a minimum acceptable table cell width, the TSM calls the TCSM with the width set at zero. The vertical table cell interprets this as a request to flow the vertical table cell with the character flow distance (CFD) 33 equal to zero. With the CFD set at zero, a new vertical line is forced after each character. This creates a very wide table cell width 29, not the desired minimum acceptable table cell width. Therefore, the TCSM is unable to measure the necessary minimum and maximum acceptable table cell widths.

Further, without these determined minimum and maximum acceptable widths for each individual cell within a column 19, 29, the TSM will be unable to propose a width for that column 43.

However, the existing methodology fails for at least one more reason. Even if the TSM could propose a width P 43, without knowing the minimum 29 and maximum 19 acceptable table cell widths, the TCSM could not use the proposed P anyway. P does not tell the TCSM how far to flow characters in the character flow direction. The TSM needs to know a CFD 42 in order to know how far to flow the characters in the table cell, and the proposed P 43 does not provide the needed CFD measurement 42. This was not a problem with horizontal table cells because as shown in Figure 1, the TCSM was designed to use the proposed P 171 to determine how far characters should flow horizontally.

The invention offers a way to auto-size vertical table cells. The illustrated embodiment of the invention solves these problems and is able to auto-size table cell elements with the vertical character flow property. Further, the illustrated embodiment auto-sizes tables that contain table cells with both the vertical and the horizontal character flow property. The embodiment of the invention illustrated herein is called the vertical oriented method (VOM).

The VOM achieves the layout of HTML elements with the vertical character flow property. The VOM addresses this problem with a switch in logical perspective. The target element with the vertical character flow property is logically viewed at an angle rotated 90° clockwise. As shown in Figure 2, physical width (W) 201 becomes logical height (LH) 252, and physical height (H) 202 becomes logical width (LW) 251.

The auto-sizing of HTML elements according to the VOM, produces either left-to-right HTML rectangle area layouts, or top-to-bottom layouts using a shared table sizing routine.

Additional features and advantages of the invention will be made apparent from the following detailed description of the VOM which proceeds with reference to the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a graphical representation of a prior art horizontal character flow table cell element being measured for minimum and maximum cell width.

Figure 1a is a graphical representation of why the existing cell sizing methodology would fail to auto-size if it were given a vertical table cell.

Figure 2, according to the illustrated embodiment of the invention, is a block diagram distinguishing between the physical and logical views.

Figure 3 is a flow chart depicting flow process in the table sizing method.

Figure 4 is a flow chart depicting vertical oriented method implementation of minimum and maximum cell width dimensions.

Figure 5 is a flow chart depicting the vertical oriented method for measurement of table cell at proposed width.

Figure 6 is a graphical representation of the logical view of a typical vertically oriented table cell being measured for minimum table cell logical height.

Figure 7 is a graphical representation of a vertical character flow table cell being measured for maximum logical height, and for a arbitrary proposed width P.

Figure 8 is a graph that depicts the minimum and maximum width vertical table cells, and the potential solution set for some arbitrary table cell dimensions (LW_i, LH_i) with logical height near the requested P value.

Figure 9 is a block diagram of a distributed computer system that may be used to implement the detailed description.

DETAILED DESCRIPTION

The illustrated embodiment is directed towards an HTML layout feature, which auto-sizes HTML tables and other HTML elements that have vertical

character flow. For convenience purposes, the illustrated embodiment of the invention is labeled the vertical oriented method (VOM). Before describing the VOM, this document further discusses the existing table sizing method.

5 Horizontal Character Flow

In Figure 1, the existing table sizing method (TSM) was designed to layout a table containing rows and columns of table cells, where each table cell 104 contains characters that flow horizontally 103. The TSM determines the number of table cells per column and per row that need to fit within the table.

10 The TSM uses this information to propose a width for each column.

However, before a width for each column can be proposed, the TSM needs to know the minimum 101 and maximum 151 acceptable width possible for each cell within a column. A Browser needs to be prepared to accept a wide variety of elements within a table cell—such as characters, images, and etc. 15 If a given item is designed to be presented in entirety without being broken apart (i.e., an image), or without being forced onto separate lines (i.e., single syllable words), the largest of such unbreakable items is the largest non-breakable unit within the table cell or given area 102. This is important because the width of the column should not be less than the largest non- 20 breakable unit within any cell in the column.

As shown in Figure 1, the minimum acceptable width of a cell 101, is equal to the width of the largest non-breakable object within the cell 102. Whereas, the maximum acceptable width for a cell is simply the width of the cell 151 when each paragraph within the table cell is laid out horizontally on a 25 single line 152. As shown in Figure 1, the table cell labeled “Maximum Cell Width Measurement” has only one sentence 152. If the table cell had two or more paragraphs, each paragraph would appear within the table cell 152, with the second paragraph directly below the first, and all within the same cell box

152. In that case, the maximum acceptable table cell width would be whichever paragraph is widest 151.

The TSM determines the minimum 101 and maximum 151 acceptable table cell width by calling the table cell sizing method (TCSM). The TSM
5 manages the entire table, whereas the TCSM simply sizes individual cells within the table.

The TSM calls the TCSM each time it needs to auto-size the table. The TSM needs to auto-size the table (i) on initial table layout, (ii) on subsequent window size adjustments, (iii) on changes in the properties of the Object Model
10 (OM), (iv) on editing actions, and (v) on other occasions.

The TSM requests a minimum and maximum acceptable width for each table cell from a table cell sizing method (TCSM). The TCSM determines the maximum acceptable cell width by flowing the text and graphical content into the table cell with the width set at infinity 151. The width is used by the
15 TCSM to determine how far to let characters flow before forcing the next horizontal line. With the character flow distance set at infinity, each paragraph in the cell is flowed into a separate horizontal line 152. Accordingly, the table cell maximum acceptable width is generally defined as the width 151 of the longest paragraph when each word of that paragraph is placed in one
20 horizontal line 152.

The TCSM next determines the minimum acceptable cell width by flowing the characters into a cell with the width set at zero 100. At zero width, each word in the cell content is forced onto a separate horizontal line
104. This creates a horizontal line for each word in the cell content. The table
25 cell minimum acceptable width is generally defined as the width of the longest word 102.

Based on these determined minimum 101 and maximum 151 acceptable widths for each individual cell within the table, the TSM will be able to propose

009260" 34204960

a width for each column within the table. The TSM then asks the TCSM to render each table cell within a column at the proposed width (P) 171. The TCSM flows the content into the table cell at the proposed width P 171. The TCSM then measures the resulting height (H) 181 and width (W) 180 of the table cell. The TSM then lays out the table based on the measured dimensions of the cells in each column.

In more detail, the TSM steps are as follows:

1. Calculate the minimum and maximum cell width for each cell in the table.

a. Minimum Cell Width: This determination is made by TSM with a call to TCSM(W=0). When W is set to zero, this forces the TCSM to place the smallest non-breakable object on each horizontal line (in this case a word). The minimum width 101 for which this table cell can be rendered, is equal to the width of the word "Where" 102. Therefore, the TCSM returns to the TSM the minimum width set equal to the width of "Where" in pixels.

TCSM(W=0) -> (W=actual, H=actual)

b. Maximum Cell Width: This determination is made by TSM with a call to TCSM(W=infinity). When width is set to infinity, this allows the TCSM to place each paragraph within the cell onto one line 152. The horizontal length of the longest paragraph in the cell is the maximum width. This represents the maximum possible width 151 that this table cell could possibly need in order to render its content element. Therefore, the TCSM returns to the TSM, the maximum cell width 151 set equal to the width of "Where did the crow fly?" 152 in pixels.

TCSM(W=infinity) -> (W=actual, H=actual)

2. Calculate each columns' width based on the minimum and maximum sizes of each cell within the column. Set a proposed width for each column (P).

3. Measure the height of each cell 181, at the proposed width P 171, for each cell within each column.

a. Measure Cell Height: This determination is made by TSM with a call to TCSM(W=P). When W is set to P, this instructs the TCSM to fill each successive table cell horizontal line until width P is reached 171, and then to place the overflow onto the next horizontal line. The TCSM then returns the actual height 181 and the actual width measurements of the cell in pixel units.

TCSM(W=P) -> (W = actual, H = actual)

4. The TSM then renders the table on the display.

Now that the pre-invention relationship between the TSM and the TCSM has been defined, it will be easier to understand the VOM.

Vertical Oriented Method (VOM)

The VOM allows the pre-existing TSM-TCSM to continue to layout horizontally oriented table cells in a table, but also to layout one or more vertically oriented cells within the same table. Additionally, the VOM allows the TSM-TCSM to layout a table that consists entirely of vertically oriented table cells. Further, the VOM is not limited to HTML tables, but can be used to implement the vertical character flow property in other non-table cell HTML child elements such as DIV and SPAN within other parent elements such as BODY.

The Logical Perspective of the VOM

A seen in Figure 2, the VOM implements a logical view of the dimensions. Logical width (LW) 251 is defined as the direction of character flow 253, and logical height (LH) 252 is defined as perpendicular to LW. So
5 the VOM maintains a logical view that is rotated by 90 degrees clockwise from the TSM coordinate system. In the VOM world, W becomes LH, and H becomes LW.

However, neither the TSM nor the TCSM is aware of this logical transformation. Rather through the VOM, the TSM obtains a width (W) 201
10 and height (H) 202 for each cell in the table, and uses this information to render the table. From the TSM and TCSM perspective even after the invention, W 201 remains horizontal, and H 202 remains vertical.

The TSM was designed to directly call the TCSM to determine minimum
101 and maximum 151 acceptable table cell width. Next, the TSM was
15 designed to directly call the TCSM with a proposed width P 171 in the horizontal character flow direction, and return the height of the cell in the vertical direction 181. Since in vertical cells, the character flow direction is vertical 203, the TCSM appears to be inadequate for the task at hand.

To overcome this problem, when a table cell has the vertical character
20 flow property, the VOM is responsible for proper communications between the TSM and TCSM. Above under the heading "Horizontal Character Flow" four TSM Steps were discussed. These four Steps continue to exist as represented in Figure 3, (Step 1 = 301, Step 2 = 311, Step 3 = 321, Step 4 = 331),
however, when the table cell element has the vertical character flow property,
25 the VOM manages communications between the TSM and TCSM to obtain the desired results.

In the case of a table cell element with the vertical character flow property, the VOM is implemented 302-303, as defined in Figure 4, and the

VOM is implemented 322-323, as defined in Figure 5. These VOM implementations will be discussed in detail, but first lets examine the VOM's logical view of a vertical table cell.

TSM-TCSM and The VOM implementation at Steps 1 and 3

5 The VOM implementation has the additional benefit that it fits within the existing TSM-TCSM architecture created for horizontal text flow. This specification will discuss how the VOM manages the communications between the TSM and TCSM to bring about a method for measurement of a table cells with vertically oriented character flow.

10 As previously discussed, and as shown in Figure 3, the four general steps involved in the existing TSM-TCSM relationship continue. However, during Steps 1 301-303, and Step 3 321-323, if a table cell is vertical, the VOM manages the communications between the TSM and TCSM as follows:
Altered Step1:

15 When TSM asks the TCSM to calculate the minimum and maximum cell width for each cell in the table, the VOM checks to see whether the given table cell element has the vertical character flow property 302.

 If the given table cell has the horizontal character flow property, then the TCSM can compute the minimum and maximum cell width as discussed above
20 under Horizontal Character Flow.

 If the given table cell has the vertical character flow property 302, then the VOM measurement is implemented 303, as shown in Figure 4. The VOM determines the minimum and maximum width as follows:

25 a. Minimum Cell Width: When the TSM requests minimum acceptable cell width, that request is turned into a request for minimum LH by the VOM. As seen in Figure 6, the minimum LH 652 can be obtained by setting the character flow distance (CFD) equal to infinity 656. This forces all characters within each

paragraph of the cell contents to flow into one single vertical line.

In the case of vertical table cells, character flow distance (CFD) has the same meaning as LW . As shown in Figure 4, the VOM calls the TCSM($LW_i = \infty$) 402, and the TCSM returns

(LW_{\max}, LH_{\max}) and $LW_{\text{longest obj}}$ 654 to the VOM. The subscript "max" on LW and LH, signifies that all characters in each paragraph of the cell were forced into one vertical line because the character flow distance (LW) was set to infinity 656. Since all paragraphs are on one vertical line the resulting LH 652, measurement is actually a minimum. So the VOM returns (LH_{\max}) to the TSM as the minimum acceptable cell width measurement for that table cell. The output $LW_{\text{longest obj}}$ 654, is the measurement of the longest object (character or other element) in the cell, when the measurement of each such object is taken in the character flow direction 653. Notice that the VOM has changed the input to the TCSM as follows:

Horizontal Minimum Acceptable Table Cell Input:

TCSM($W = 0$)

Vertical Minimum Acceptable Table Cell Input:

TCSM($LW = \text{infinity}$).

Although neither the TCSM nor the TSM are aware of this VOM implementation, the TSM now has the proper minimum acceptable table cell width measurement.

- b. Maximum Cell Width: When the TSM requests maximum acceptable cell width, that request is turned into a request for maximum LH by the VOM. As seen in Figure 6, the maximum LH 672 could be obtained by setting the character flow distance (LW)

equal to zero 673. By setting the character flow distance LW equal to zero, a single character is forced onto each vertical line, creating the greatest possible LH 672. However, this is not acceptable because readers are expecting to read vertically down the column and this reads from right to left. This would be the equivalent of one word per horizontal line in horizontal languages. This is a failed attempt at setting the maximum acceptable table cell width 672. In Figure 4, the VOM solves this problem by introducing an equation that forces a minimum number of characters per vertical line 403 in order to meet the expectations of readers of a given language. For example, Japanese typography is measured at a character flow distance of LW_0 , where $LW_0 = \text{maximum of } LW_{\text{longest obj}} \text{ and } N \cdot LW_{\text{average char}}$ 403. Note that $LW_{\text{average char}}$ is the average width of all characters in the current writing script. It is helpful to keep an already determined $LW_{\text{average char}}$ for each vertical language character set in a table for quick access. Further, N is a constant which should be empirically determined based on the expectations of readers in each vertical language. In Japanese, $N=10$, since it was empirically determined to be within a Kanji readers minimum vertical line height expectations. Further, a table cell may contain other objects with a greater LW than $N \cdot LW_{\text{average char}}$. In such cases, the $\max()$ function 403 assures that such greater $LW_{\text{longest obj}}$ will become the LW_0 . So the VOM first determines the character flow distance LW_0 753, and then calls $\text{TCSM}(LW_0)$ 754. The output of this process is (LW_{\min}, LH_{\min}) 752-753. The VOM returns LH_{\min} to

the TSM as the maximum cell width measurement. Characters are flowed into a vertical line until the vertical length LW_0 754 is reached. Each time the character flow reaches LW_0 , a new vertical line starts, and the characters begin to flow into the new vertical line. In this case, since $N = 10$, the table cell receives about 10 characters per vertical line 753. In a given table cell of X Kanji characters, the resulting table cell is created with height of approximately N characters, and a physical width of approximately X/N characters. By holding the character flow distance at LW_0 , it creates a maximum LH 752 that is labeled (LH_{\min}) 752. Again, the subscript "min" on LH, refers to the minimum LW of LW_0 , which in turn creates a maximum LH measurement. Notice that the VOM has changed the input to the TCSM as follows:

Horizontal Maximum Acceptable Table Cell Input:

TCSM($W = \text{infinity}$)

Vertical Maximum Acceptable Table Cell Input:

$$\text{TCSM}(\max(LW_{\text{longest obj}}, N \cdot LW_{\text{average char}})).$$

Although neither the TCSM nor the TSM are aware of this VOM implementation, the TSM now has the proper maximum acceptable table cell width measurement.

Calculated sizes (LW_{\min}, LH_{\min}) and (LW_{\max}, LH_{\max}) are stored by the VOM 405, to be used later in Step 3--VOM Implementation, and (LH_{\min}) is returned to TSM as a maximum acceptable cell width 406, and (LH_{\max}) is returned to TSM as a minimum acceptable cell width 406.

Step 2 (Unaltered).

The TSM determines a proposed width for each column in the table based on the minimum and maximum table cells widths collected in Step 1.

5 Step 3--VOM Implementation:

As shown in Figure 3, in case of table cell with the vertical character flow property 322, the VOM is implemented 323. In this Step, the TSM needs to find out the height of each cell within the column at the proposed width P. So, the TSM calls the TCSM to measure the height of each cell within the column at the proposed P.

10 In Figure 7, the TCSM can only measure the cell logical height 772 and logical width 773 dimensions, after it has been told how far to let characters flow in the character flow direction (CFD) 775, before forcing a new vertical line. The desired P 771 offered by the TSM does not tell the TCSM how far to let characters flow vertically 775, rather P represents the LH direction 772. Since the table cell is vertical in this case, the proposed width P 771 is perpendicular to the character distance LW_i 773.

15 So VOM solves this problem by estimating a character flow distance LW_i 773, that is most likely to result in LH_i 772, that is close to the P 771 requested by the TSM.

20 Once the VOM has estimated the character flow distance LW_i 773, the VOM calls $TCSM(LW_i)$. The TCSM flows the characters into the table cell at the character flow distance of LW_i , and then returns the resulting table cell dimensions to VOM. The VOM checks to see if the resulting width LH_i 772 measurement is close enough to the requested P 771. If so, the resulting cell

25

dimensions, LH_i 772 and LW_i 773, are returned to TSM as they will be rendered in the actual table view--($W = LH_i, H = LW_i$) 775-776.

Figure 5, and the following steps define how the initial LW_i 773 estimate is determined ($i=0$), and how subsequent LW_i estimates are determined ($i=1$,

5 2,...) until the resulting LH_i 772 measurement for a corresponding LW_i is within an acceptable range of the P 771 requested by the TSM.

Finally, before looking at the following steps, the relationship between LH and LW is considered. A table cell is rectangular in shape and the final dimensions must be capable of holding all characters (or other objects) defined for that cell. If one side of the rectangle is decreased, the other side of the rectangle will generally increase in order to hold the contents. So if LW is increased, LH will generally decrease, or if LW is decreased, LH will generally increase. LW and LH have an inverse relationship.

Further, when the cell has the vertical character flow property, the LW has the additional general restriction that each vertical sentence in the cell will have approximately N characters (as defined above in Step 1--VOM Implementation).

Figure 5 presents the VOM implementation for cells with the vertical character flow property. The basic premise of Step 3--VOM Implementation is that the VOM receives a requested P from the TSM, and the TSM expects to receive in return the height and width of the rendered cell. However, the TCSM can not use P 771 as input since P is not in the character flow direction 774, so the following steps must find acceptable dimensions another way. The VOM accepts the requested P and performs the following steps until acceptable cell dimensions are estimated:

25 A. Case $P \geq LH_{\min}$: In Figure 8 and Figure 5, if the TSM requests

$P \geq LH_{\min}$ 502, 802, then the VOM returns the dimensions

009260" 9420/950

($W = LH_{\min}, H = LW_{\min}$) 503, 805. In that case, LH_{\min} 752 is most likely the largest logical height to be reached by the cell because it was determined when LW was set at a minimum 753. So if the TSM requests P 501 such that $P \geq LH_{\min}$ 502, simply return the rectangle dimensions already calculated in Step 1(b) 503. There is no need to estimate an initial LW_i . Since TSM is requesting a P that is greater than necessary to hold the cell contents even when LW is set at its minimum 805, no further calculation need be done. We simply return the rectangle area measured 700 in Step 1(b)--VOM Implementation in the coordinate system expected by TSM--($W = LH_{\min}, H = LW_{\min}$) 503, 805.

B. Case $P \leq LH_{\max} + \delta$: In Figure 8 and Figure 5, if the TSM requests $P \leq LH_{\max} + \delta$ 801, 504, then the VOM returns ($W = LH_{\max}, H = LW_{\max}$) 806, 505. In that case, LH_{\max} is most likely is the smallest LH 652 to be reached by the cell since it occurs when all characters are placed on one vertical line 651. So if $P \leq LH_{\max} + \delta$, simply return the table cell dimensions 600 already calculated in Step 1(a)--VOM Implementation. δ is an acceptable error, which can introduce some blank space during rendering, but noticeably increases performance and at the same time will not introduce any content clipping. δ may range from 10-30% of P, but is presently set at 30% of P at this time in the calculation. Simply return the rectangle area measured in Step 1(a)--VOM Implementation in the coordinate system expected by TSM-- ($W = LH_{\max}, H = LW_{\max}$) 806, 505.

C. In Figure 8, if neither case A 802 nor case B 801 is true, then the minimum and maximum table width sizes determined for this cell in Step 1--VOM Implementation, cannot be used directly for the requested P

771. So the VOM must then estimate an LW_i 773, 807 that will likely result in a LH_i 772, 808 that is within an acceptable range of the requested P 771, 803. From case A and B, we already know that requested P is greater than $LH_{\max} + \delta$ 801, 505, but less than and LH_{\min} 802, 502. Therefore, as depicted in Figure 8, the initial search boundaries 803 804 for an acceptable rectangle to hold the cell contents is set as: $(LW_{\text{start}}, LH_{\text{start}}) = (LW_{\min}, LH_{\min})$ 805 and $(LW_{\text{end}}, LH_{\text{end}}) = (LW_{\max}, LH_{\max})$ 806. The goal then is to guess an LW_i 807, 773 between (LW_{start}) and (LW_{end}) that upon a call to $\text{TCSM}(LW_i)$, will return an output (LW_i, LH_i) , such that LH_i 808, 772 is within an acceptable error of the proposed width P 771.

D. In Figure 5, using an averaging formula, an initial proposed logical width LW_i 507 is set that is likely to result in an LH_i near the proposed width P 771.

$$LW_i = \frac{LW_{\text{start}} \cdot LH_{\text{start}} + LW_{\text{end}} \cdot LH_{\text{end}}}{2 \cdot P}.$$

This formula assumes that each non-breakable unit inside the table cell is the same size and is square. This is true for the common case in Asian Typography, where each character is a "word" and the glyph for that character is typically square. Note that if the content is not of this nature, then this first approximation will fail and we will have to estimate a new LW_i in subsequent iterations. However, in most cases, based on the square characteristics of Asian Typography, this LW_i estimate works and the search for an LW_i that results in a LH_i that is within an acceptable range of the requested P is successful. However, the following steps make a few adjustments to the resulting LW_i , before the call to $\text{TCSM}(LW_i)$.

E. For better performance during the first iteration $i = 0$ 508, we make two adjustments that increase the probability that $P > LH_i$.

$$1. \quad LW_i \text{ is adjusted such that } LW_i = \max\left(LW_i, \frac{LW_{end} \cdot LH_{end}}{P}\right).$$

If the cell contains more than one paragraph or it contains irregular
chunks of text, $\frac{LW_{end} \cdot LH_{end}}{P}$ can give a better approximation of the
requested size.

2. The acceptable error δ is increased only for this pass so as
to increase the probability of success. δ is set at 30% of P for $i = 0$,
and for 10% of P for $i = 1, 2, 3, \dots$

F. For better performance during all subsequent iterations ($i \neq 0$) 509, set

$$LW_i = \frac{LW_i + \frac{LW_{start} + LW_{end}}{2}}{2}.$$

This will increase the probability that $P > LH_i$.

G. In every case, where the element content contains characters only
(majority of cases), increase LW_i 510 as follows:

$$LW_i = LW_{average \text{ char}} \cdot \left(1 + \frac{LW_i - 1}{LW_{average \text{ char}}}\right).$$

H. Now, run TCSM(LW_i) 511 to obtain the height and width dimensions of
the cell at the resulting proposed logical width LW_i . The output of this
process is (LW_i, LH_i) .

I. If the calculated logical height LH_i 512 is within the acceptable error of
 P as follows: $LH_i \leq P \leq (LH_i + \delta)$, then return $(W = LH_i, H = LW_i)$
513 as the cell dimensions to the TSM.

J. If calculated logical height is outside the searching boundary as follows:

$(LH_i > LH_{start} \text{ and } LH_i < LH_{end})$ 514, then return the best solution so far $(W = LH_{end}, H = LW_{end})$ 515 to the TSM. This exit condition can be satisfied in case of content having objects with extreme size differences and is treated as an error escape from the searching algorithm.

K. If searching range is too small $LW_{average \text{ char}} \geq \frac{LW_{end} - LW_{start}}{2}$ 516, return the

best solution so far. This condition guarantees a finite searching process. If $P < LH_i$ return $(W = LH_{end}, H = LW_{end})$ 515 to the TSM, otherwise return $(W = LH_i, H = LW_i)$ 513 to the TSM.

L. If during the i-th step, there is no progress

$(LW_i, LH_i) \in \{(LW_{start}, LH_{start}), (LW_{end}, LH_{end})\}$ 517, return the best solution so far $(W = LH_{end}, H = LW_{end})$ 515 to the TSM.

M. At this point an acceptable solution hasn't been found and none of the stop conditions has been satisfied. So the search boundary needs to be reduced before repeating the search steps. If $P < LH_i$ 518, then change the start condition $(LW_{start}, LH_{start}) = (LW_i, LH_i)$ 519, otherwise change the end condition $(LW_{end}, LH_{end}) = (LW_i, LH_i)$ 520.

N. Increment iteration counter i 521 and go to Step 3--VOM

Implementation, paragraph D 507, to estimate a new LH_i and continue the search process.

Step 4 (Unaltered). The VOM implements no actions in the TSM Step 4.

This completes the discussion of the VOM adaptation to the existing TSM-TCSM table cell auto-sizing relationship. However, the VOM is adaptable

to several other HTML contexts such as DIV, SPAN, BLOCKQUOTE, etc.
Anytime a calling object or method needs to position a vertical character flow object within a given area, the VOM can be applied.

In such a case the calling object or method would perform the steps
5 substantially as defined herein for the TSM, the called object or method would perform the steps substantially as defined herein for the TCSM, and the VOM adaptation would continue to perform substantially as herein described.

For example, given an HTML BODY element containing an HTML DIV
10 element with the vertical character flow property, the VOM implementation could be used to determine the minimum and maximum DIV element widths, and then flow the DIV element contents at a proposed width P, requested by the BODY element.

Further, there would be empirically determined alterations to N based on
15 (i) the given character set (or language) and (ii) the human expectations for that character set (or language) in the context the vertical character flow object is displayed.

Exemplary Operating Environment

Figure 9 and the following discussion are intended to provide a brief,
20 general description of a suitable computing environment in which the invention may be implemented. While the invention will be described in the general context of computer-executable instructions of a computer program that runs on a computer and/or computer printer, those skilled in the art will recognize that the invention also may be implemented in combination with other program
25 modules. Generally, program modules include routines, programs, components, data structures, etc. that perform particular tasks or implement particular abstract data types. Moreover, those skilled in the arts will appreciate that the invention may be practiced with other computer system

configurations, including hand-held devices, multiprocessor systems, microprocessor-based or programmable consumer electronics, minicomputers, mainframe computers, and the like. The illustrated embodiments of the invention also can be practiced in networked computing environments, or on stand-alone computers.

Further, the illustrated embodiment of the invention may be practiced on all the following either alone or in a network environment (wireless or not): portable computing devices, electronic organizers, electronic day planners, electronic devices with screens, devices connected to screens, devices connected to printers, cell phones with miniature browsers, textual pagers, hand-held inventory devices, vehicles containing onboard devices with displays, or devices of any kind that render text or character for display or printing.

With reference to Figure 9, an exemplary system for implementing the invention includes a conventional computer 820 (such as personal computers, laptops, palmtops or handheld-PCs, set-tops, servers, mainframes, and other variety computers) includes a processing unit 821, a system memory 822, and a system bus 823 that couples various system components including the system memory to the processing unit 821. The processing unit may be any of various commercially available processors, including Intel x86, Pentium and compatible microprocessors from Intel and others, including Cyrix, AMD and Nexgen; Alpha from Digital; MIPS from MIPS Technology, NEC, IDT, Siemens, and others; and the PowerPC from IBM and Motorola. Dual microprocessors and other multi-processor architectures also can be used as the processing unit 821.

The system bus may be any of several types of bus structure including a memory bus or memory controller, a peripheral bus, and a local bus using any of a variety of conventional bus architectures such as PCI, VESA, AGP,

Microchannel, ISA and EISA, to name a few. The system memory includes read only memory (ROM) 824 and random access memory (RAM) 825. A basic input/output system (BIOS), containing the basic routines that help to transfer information between elements within the computer 820, such as

5 during start-up, is stored in ROM 824.

The computer 820 further includes a hard disk drive 827, a magnetic disk drive 828, e.g., to read from or write to a removable disk 829, and an optical disk drive 830, e.g., for reading a CD-ROM disk 831 or to read from or write to other optical media. The hard disk drive 827, magnetic disk drive

10 828, and optical disk drive 830 are connected to the system bus 823 by a hard disk drive interface 832, a magnetic disk drive interface 833, and an optical drive interface 834, respectively. The drives and their associated computer-readable media provide nonvolatile storage of data, data structures, computer-executable instructions, etc. for the computer 820. Although the

15 description of computer-readable media above refers to a hard disk, a removable magnetic disk and a CD, it should be appreciated by those skilled in the art that other types of media which are readable by a computer, such as magnetic cassettes, flash memory cards, digital video disks, Bernoulli cartridges, and the like, may also be used in the exemplary operating

20 environment.

A number of program modules may be stored in the drives and RAM 825, including an operating system 835, one or more application programs 836, other program modules 837, and program data 838.

A user may enter commands and information into the computer 820

25 through a keyboard 840 and pointing device, such as a mouse 842. Other input devices (not shown) may include a microphone, joystick, game pad, satellite dish, scanner, or the like. These and other input devices are often connected to the processing unit 821 through a serial port interface 846 that is

coupled to the system bus, but may be connected by other interfaces, such as a parallel port, game port or a universal serial bus (USB). A monitor 847 or other type of display device is also connected to the system bus 823 via an interface, such as a video adapter 848. In addition to the monitor, computers
5 typically include other peripheral output devices (not shown), such as speakers and printers.

The computer 820 operates in a networked environment using logical connections to one or more remote computers, such as a remote computer 849. The remote computer 849 may be a server, a router, a peer device or
10 other common network node, and typically includes many or all of the elements described relative to the computer 820, although only a memory storage device 850 has been illustrated. The logical connections depicted include a local area network (LAN) 851 and a wide area network (WAN) 852. Such networking environments are commonplace in offices, enterprise-wide computer networks, intranets and the Internet.
15

When used in a LAN networking environment, the computer 820 is connected to the local network 851 through a network interface or adapter 853. When used in a WAN networking environment, the computer 820 typically includes a modem 854 or other means for establishing
20 communications (e.g., via the LAN 851 and a gateway or proxy server 855) over the wide area network 852, such as the Internet. The modem 854, which may be internal or external, is connected to the system bus 823 via the serial port interface 846. In a networked environment, program modules depicted relative to the computer 820, or portions thereof, may be stored in the remote
25 memory storage device. It will be appreciated that the network connections shown are exemplary and other means of establishing a communications link between the computers may be used.

005260" 9420/960

In accordance with the practices of persons skilled in the art of computer programming, the present invention is described below with reference to acts and symbolic representations of operations that are performed by the computer 820, unless indicated otherwise. Such acts and operations are sometimes
5 referred to as being computer-executed. It will be appreciated that the acts and symbolically represented operations include the manipulation by the processing unit 821 of electrical signals representing data bits which causes a resulting transformation or reduction of the electrical signal representation, and the maintenance of data bits at memory locations in the memory system
10 (including the system memory 822, hard drive 827, floppy disks 829, and CD-ROM 831) to thereby reconfigure or otherwise alter the computer system's operation, as well as other processing of signals. The memory locations where data bits are maintained are physical locations that have particular electrical, magnetic, or optical properties corresponding to the data bits.

15 Having described and illustrated the principles of our invention with reference to an illustrated embodiment, it will be recognized that the illustrated embodiment can be modified in arrangement and detail without departing from such principles. It should be understood that the programs, processes, or
20 methods described herein are not related or limited to any particular type of printer or computer apparatus, unless indicated otherwise. Various types of general purpose or specialized computer apparatus may be used with or perform operations in accordance with the teachings described herein. Elements of the illustrated embodiment shown in software may be
25 implemented in hardware and vice versa.

Further, although illustrated as implemented in a computer printer, the invention can be practiced in other printing apparatus, such as copiers, fax machines, combined purpose printers, etc.

In view of the many possible embodiments to which the principles of our invention may be applied, it should be recognized that the detailed embodiments are illustrative only and should not be taken as limiting the scope of our invention. Rather, we claim as our invention all such embodiments as may come within the scope and spirit of the following claims and equivalents thereto.

[illegible]

We claim:

1. In a computer system with a textual mark-up language engine, a
5 table sizing method designed to auto-size table elements, a table cell sizing
method designed to auto-size table cell elements with a horizontal character
flow property, a method for altering the input and output between the table
sizing method and the table cell sizing method to render auto-sized textual
mark-up language table cells with a vertical character flow property, the
10 method comprising:

determining that a call to a table cell sizing method from a table sizing
method is a request to determine an acceptable minimum width table cell
measurement for a given table cell and the request includes a minimum width
input designed to be used by a table cell element with the horizontal character
15 flow property to render a minimum table cell width;

determining that the given table cell content element has the vertical
character flow property;

increasing the minimum width input enough so that it is likely that all
characters or objects within each paragraph in the table cell will be flowed into
20 a separate single vertical line; and

calling the table cell sizing method with the increased input.

2. The method of claim 1, where an output from a call to the table cell
sizing method consists of a logical height measurement and a logical width
25 measurement, and the logical height measurement is returned to the table
sizing method as the acceptable minimum width for the given table cell.

3. The method of claim 1, where an output from the call to the table cell sizing method is a measurement of a character or other object in the content element with a longest logical width measurement, the longest logical width measurement being determined by measuring each object or character in the vertical direction.

4. The method of claim 2, where a next call by the table sizing method regarding the given table cell is a request to size that table cell at a proposed width of less than or equal to said logical height returned to the table sizing method as the acceptable minimum table cell width plus some minimal acceptable error, and the logical height and logical width measurements are returned to the table sizing method, the logical height returned as physical width, and the logical width returned as physical height.

5. The method of claim 4, where the acceptable minimum error ranges from ten to thirty percent of the proposed width.

6. In a computer system with a textual mark-up language engine, a table sizing method designed to auto-size table elements, a table cell sizing method designed to auto-size table cell elements with a horizontal character flow property, a method for altering communications between the table sizing method and the table cell sizing method to render auto-sized textual mark-up language table cells with a vertical character flow property, the method comprising:

determining that a call to a table cell sizing method from a table sizing method is a request to determine an acceptable maximum width table cell measurement for a given table cell and the request includes a maximum width

input designed to be used by a table cell element with the horizontal character flow property to render a maximum table cell width;

determining that the given table cell content element has the vertical character flow property;

5 determining an average character logical width for a language contained in the given table cell;

determining a maximum distance that characters will be allowed to flow in the vertical character flow direction, the determination being made based on some empirically determined number N multiplied by the average character

10 logical width;

calling the table cell sizing method with the maximum width input changed to the determined distance that characters will be allowed to flow in the character flow direction.

15 7. The method of claim 6, where an output from the call to the table cell sizing method consists of logical height and logical width measurements and the logical height measurement is returned to the table sizing method as the acceptable maximum width table cell.

20 8. The method of claim 6, where the empirically determined number N is empirically determined based on the average number of characters in a vertical line in print or other popular media that typically displays that character set.

25 9. The method of claim 6, where said determining a maximum distance that characters will be allowed to flow in the character flow direction is increased to the greater of the longest object logical width or the empirically determined number N multiplied by the average character logical width.

10. The method of claim 6, where a next call by the table sizing method regarding the given table cell is a request to size that table cell at a proposed physical width greater than or equal to the logical height returned to the table sizing method as the maximum acceptable width table cell, and the logical height and logical width measurements are returned to the table cell sizing method, the logical height returned as physical width, and the logical width returned as physical height.

11. A method for auto-sizing textual mark-up language table cells with a vertical character flow property, the method comprising:

determining that a table cell has the vertical character flow property;
estimating a logical width for input to a table cell sizing method; and
calling the table cell sizing method with the estimated logical width

input;

12. The method of claim 11 where the estimated logical width input is determined by dividing the area of a minimum logical height rectangle by a physical width proposed by a table sizing method.

13. The method of claim 11 where the estimated logical width input is determined by dividing the area of a maximum logical height rectangle by a physical width proposed by a table sizing method.

14. The method of claim 11 where the estimated logical width input is determined by averaging the logical heights of a maximum logical height rectangle and a minimum logical height rectangle.

15. The method of claim 11 where the estimated logical width input is determined by summing the areas of a minimum logical height rectangle with a maximum logical height rectangle, and dividing that sum by twice a physical width proposed by the table sizing method.

5

16. The method of claim 11, where an output from a call to the table cell sizing method is examined and a determination is made as to whether a resulting logical height measurement output is within a minimum acceptable error of a physical width proposed by the table sizing method.

10

17. The method of claim 11, where if a returned actual logical height output is within an acceptable minimum error of a physical width proposed by the table sizing method, the actual logical width output is returned to the table sizing method as a physical height, and a returned logical height output is returned to the table sizing method as a physical width.

15

18. In a computer system with a textual mark-up language engine, a parent textual mark-up language element with a horizontal character flow property, a child textual mark-up language element with a vertical character flow property, a method for determining a proposed logical width dimension, the method being given a proposed physical width, a desired layout area, and the child element, the method comprising:

20

determining an area of a minimum logical height rectangle for the child element by flowing each paragraph or sentence in the child element into a single line in the character flow direction; and

25

obtaining an actual logical width of a minimum logical height rectangle by measuring a length of a longest line in the child element in the character flow direction;

obtaining an actual logical height of a minimum logical height rectangle by finding and summing the measurements of each character or object in each said line that occupies the most space in the direction perpendicular to the character flow direction and adding a minimal space

5 between lines to improve readability; and

multiplying the obtained actual logical height by the obtained actual logical width;

determining an area of a maximum logical height rectangle for the child element by;

10 setting a maximum logical width for the maximum logical height rectangle;

flowing the child element into the maximum logical height rectangle in a line in the character flow direction so long as no next character or object in the content element being flowed into the line would cause the length of the line to exceed the set maximum logical width;

15 starting a new line next to and parallel to the previous line and flowing the content element into that line each time the next character or object in the child element would cause the line then being flowed into the rectangular area to exceed the set maximum logical width;

20 obtaining an actual logical width of the maximum logical height rectangle by finding and measuring a length of the longest line in the character flow direction;

obtaining an actual logical height of the minimum logical height rectangle by finding and summing the measurements of each character or object in each said line that occupies the most space in the direction perpendicular to the character flow direction and adding a minimal space between lines to improve readability;

25

multiplying the obtained actual logical height by

0092350" 94302950

the obtained actual logical width in order to determine the area of the maximum logical height rectangle;

- determining a proposed logical width by summing the areas of the determined maximum logical height rectangle and the determined minimum logical height rectangle and dividing the sum by approximately twice the proposed physical width.

19. The method of claim 18, where the determined proposed logical width is set at the greater of itself or the value determined by dividing the area of the determined minimum logical height rectangle area by the proposed physical width.

20. The method of claim 18, where the determined proposed logical width value is altered, the method comprising:

- determining an average character logical width value for a language character set by accessing a table containing a value for the language character set;

obtaining a subtracted value by subtracting the integer value one from the determined proposed logical width value;

- obtaining a divided value by dividing the subtracted value by the determined average character logical width value;

obtaining an added value by adding the integer value one to the divided value; and

- obtaining a new proposed logical width by multiplying the added value by the determined average character logical width value.

21. A computer readable medium having stored thereon instructions operational to auto-size a vertical character flow textual mark-up language element within an area of an output device, the instructions comprising:

a first program module designed to accept a request to auto-size textual
5 mark-up language elements;

a second program module designed to accept requests to auto-size a textual mark-up language element with the horizontal character flow property at a requested horizontal width;

a third program module designed to alter the request made to the second
10 program module by the first program module so that while the second program module continues to operate as it would for a textual mark-up language element with the horizontal character flow property, the second program module is actually auto-sizing a textual mark-up element with the vertical character flow property and the resulting auto-sized textual mark-up language
15 element is returned to the first program module within the rectangular area within an acceptable error of the requested horizontal width.

22. A computer readable medium having stored thereon instructions operational to auto-size a textual mark-up language table element within an
20 area of an output device, a first program module designed to auto-size a textual mark-up language table element, a second program module designed to accept a request from the first program module to determine the minimum and maximum table cell element width measurements, a third program module that affects the results of the request made by the first program module to the
25 second program module whenever the request to determine the minimum and maximum table cell element width measurement is for a table cell element with the vertical character flow property, the instructions comprising:

instructions affecting the results of the minimum table cell element width measurement by altering the input to the second program module so that characters are allowed to flow in the character flow direction until all characters in each paragraph flow into a single line in the character flow
5 direction;

instructions affecting the results of the maximum table cell element width measurement by altering the input to the second program module so that each time characters flowed into a line in the character flow direction exceed approximately N characters, a new line in the character flow direction is started
10 immediately next to and parallel to the previous line.

23. The computer readable medium of claim 22, wherein the instructions of the second program module are operational to determine the dimensions occupied by a table cell element, the instructions comprising:

15 determining a minimum width table cell element's height and width dimensions by measuring the table cell element after the contents of each paragraph within the table cell element are flowed into a single line in the character flow direction;

determining a maximum width table cell element's height and width
20 dimensions by measuring the table cell element after the contents of the table cell element are flowed into a line in the character flow direction and when each line exceeds approximately N characters, a new line in the character flow direction is started immediately next to and parallel to the previous line; and

returning the maximum and minimum width table cell element's height
25 and width dimensions to the third program module.

24. The computer readable medium of claim 23, wherein the instructions of the third program module are operational to change the logical

perspective of the maximum and minimum table cell element height and width dimensions, the instructions comprising:

obtaining from the second program module the maximum width table cell element's height and width dimensions and returning the height dimension to

5 the first program module as the maximum table cell width; and

obtaining from the second program module the minimum width table cell element's height and width dimensions and returning the height dimension to the first program module as the minimum table cell width.

10 25. A computer readable medium having stored thereon instructions operational to auto-size a textual mark-up language table element on an output device, a first program module designed to auto-size a textual mark-up language table element, a second program module designed to accept a request from the first program module to auto-size a textual mark-up language
15 table cell element at a proposed width, a third program module that affects the results of the request made by the first program module to the second program module whenever the request to auto-size a textual mark-up language table cell element at a proposed width is for a table cell element with the vertical character flow property, the instructions comprising:

20 determining that a table cell element has the vertical character flow property;

estimating a distance to allow characters to flow in the character flow direction, so that when the contents of the table cell element are flowed into the table cell element at the estimated distance, the resulting distance

25 perpendicular to the character flow direction is within an acceptable error of the proposed width.

009260-04202950

26. The computer readable medium of claim 25, wherein the second program module flows the table cell element at the estimated distance in the character flow direction, and the third program module returns the flowed table cell element to the first program module rotated ninety degrees clockwise.

5

27. The computer readable medium of claim 25, wherein the instructions of the third program module are operational in estimating the distance to allow characters to flow in the character flow direction for the table cell, the instructions comprising:

10 summing the areas of a minimum width table cell element and a maximum width table cell element and dividing the sum by twice the proposed width.

28. A system for rendering textual mark-up language elements with the vertical character flow property on an output device, the system comprising:

15 a first object designed to accept a request to auto-size textual mark-up language elements;

20 a second object designed to accept requests to auto-size a textual mark-up language element with the horizontal character flow property at a defined horizontal width; and

25 a third object designed to alter the request made to the second object by the first object so that while the second object continues to operate as it would for a textual mark-up language element with the horizontal character flow property, the second object is actually auto-sizing a textual mark-up element with the vertical character flow property and the resulting auto-sized element is returned to the first object rotated ninety degrees clockwise.

0092350" 912202960

29. A system for rendering textual mark-up language elements with the vertical character flow property on an output device, a first object designed to auto-size a textual mark-up language table element, a second object designed to accept a request from the first object to determine a minimum and maximum table cell element width measurement, a third object that affects the results of the request made by the first object to the second object whenever the request to determine the minimum and maximum table cell element width measurements is for a table cell element with the vertical character flow property, the system comprising:

the third object altering the minimum table cell width request to the second object so that characters are allowed to flow in the character flow direction until all characters in each paragraph flow into a single line in the character flow direction, and the second object returns the resulting height and width measurements of the table cell element to the third object, the returned width measured in the direction parallel to the character flow direction, and the returned height measured in the direction perpendicular to the character flow direction, and the third object forwards the returned height measurement to the first object as the measurement for the minimum table cell width; and

the third object altering the maximum table cell width request to the second object so that each time characters flowed into a line in the character flow direction exceeds approximately N characters, a new line in the character flow direction is started immediately next to and parallel to the previous line, and the second object returns the resulting height and width measurements of the table cell element to the third object, the returned width measured in the direction parallel to the character flow direction, and the returned height measured in the direction perpendicular to the character flow direction, and the third object forwards the returned height measurement to the first object as the measurement for the maximum table cell width.

30. The system of claim 29, wherein based on the minimum and maximum table cell widths forwarded to the first object by the third object for the table cell element, the first object later requests auto-sizing of the table cell element at a proposed width, the system comprising:

the third object estimating a distance in the character flow direction to flow the contents of the table cell element so that the resulting table cell element measurement in the direction perpendicular to the character flow direction is within an acceptable error of the proposed width;

the second object then flows the contents of the table cell element in the character flow direction at the estimated distance and then measures the table cell element dimensions;

the third object then compares the flowed table cell element dimensions to the requested width, and if the table cell element measurement in the direction perpendicular to the character flow direction is within an acceptable error of the proposed width, then the rendered table cell element is forwarded to the first object rotated ninety degrees clockwise.

31. The system of claim 30, wherein the third object re-estimates a distance to flow the characters in the character flow direction followed by the second object re-flowing the contents of the table cell at the re-estimated distance and returning the table cell dimensions to the third object until the third object determines that the table cell measurement in the direction perpendicular to the character flow direction is within an acceptable error of the proposed width, in which case the third object forwards the rendered table cell to the first object rotated ninety degrees clockwise.

32. The system of claim 30, wherein the third object estimating a distance in the character flow direction is estimated by summing the areas of the minimum and maximum width table cells for the table cell being measured and dividing the sum of the areas by twice the proposed width.

5 The method uses an HTML table cell sizing method designed to measure and layout horizontal HTML table cell elements, and implements a logical view and a search algorithm to layout table cells with the vertical character flow property. The method is also readily adaptable to layout other HTML elements with the vertical character flow property.

Parameter	Unit	Value
Initial concentration	mg/L	100
Initial pH		7.0
Temperature	°C	25
Time	h	0, 1, 2, 4, 8, 16, 32, 64, 128, 256, 512, 1024, 2048, 4096, 8192, 16384, 32768, 65536, 131072, 262144, 524288, 1048576, 2097152, 4194304, 8388608, 16777216, 33554432, 67108864, 134217728, 268435456, 536870912, 1073741824, 2147483648, 4294967296, 8589934592, 17179869184, 34359738368, 68719476736, 137438953472, 274877906944, 549755813888, 1099511627776, 2199023255552, 4398046511104, 8796093022208, 17592186044416, 35184372088832, 70368744177664, 140737488355328, 281474976710656, 562949953421312, 1125899906842624, 2251799813685248, 4503599627370496, 9007199254740992, 18014398509481984, 36028797018963968, 72057594037927936, 144115188075855872, 288230376151711744, 576460752303423488, 1152921504606846976, 2305843009213693952, 4611686018427387904, 9223372036854775808, 18446744073709551616, 36893488147419103232, 73786976294838206464, 147573952589676412928, 295147905179352825856, 590295810358705651712, 1180591620717411303424, 2361183241434822606848, 4722366482869645213696, 9444732965739290427392, 18889465931478580854784, 37778931862957161709568, 75557863725914323419136, 151115727451828646838272, 302231454903657293676544, 604462909807314587353088, 1208925819614629174706176, 2417851639229258349412352, 4835703278458516698824704, 9671406556917033397649408, 19342813113834066795298816, 38685626227668133590597632, 77371252455336267181195264, 154742504910672534362390528, 309485009821345068724781056, 618970019642690137449562112, 1237940039285380274899124224, 2475880078570760549798248448, 4951760157141521099596496896, 9903520314283042199192993792, 19807040628566084398385987584, 39614081257132168796771975168, 79228162514264337593543950336, 158456325028528675187087900672, 316912650057057350374175801344, 633825300114114700748351602688, 1267650600228229401496703205376, 2535301200456458802993406410752, 5070602400912917605986812821504, 10141204801825835211973625643008, 20282409603651670423947251286016, 40564819207303340847894502572032, 81129638414606681695789005144064, 162259276829213363391578010288128, 324518553658426726783156020576256, 649037107316853453566312041152512, 1298074214633706907132624082305024, 2596148429267413814265248164610048, 5192296858534827628530496329220096, 10384593717069655257060992658440192, 20769187434139310514121985316880384, 41538374868278621028243970633760768, 83076749736557242056487941267521536, 166153499473114484112975882535043072, 332306998946228968225951765070086144, 664613997892457936451903530140172288, 1329227995784915872903807060280344576, 2658455991569831745807614120560689152, 5316911983139663491615228241121378304, 10633823966279326983230456482242756608, 21267647932558653966460912964485513216, 42535295865117307932921825928971026432, 85070591730234615865843651857942052864, 170141183460469231731687303715884105728, 340282366920938463463374607431768211456, 680564733841876926926749214863536422912, 1361129467683753853853498429727072845824, 2722258935367507707706996859454145691648, 5444517870735015415413993718908291383296, 10889035741470030830827987437816582766592, 21778071482940061661655974875633165533184, 43556142965880123323311949751266331066368, 87112285931760246646623899502532662132736, 174224571863520493293247799005065324265472, 348449143727040986586495598010130648530944, 696898287454081973172991196020261297061888, 1393796574908163946345982392040522594123776, 2787593149816327892691964784081045188247552, 5575186299632655785383929568162090376495104, 11150372599265311570767859136324180752990208, 22300745198530623141535718272648361505980416, 44601490397061246283071436545296723011960832, 89202980794122492566142873090593446023921664, 178405961588244985132285746181186892047843328, 356811923176489970264571492362373784095686656, 713623846352979940529142984724747568191373312, 1427247692705959881058285969449495136382746624, 2854495385411919762116571938898990272765493248, 5708990770823839524233143877797980545530986496, 11417981541647679048466287755595961091061972992, 228359

Fig. 1--Prior Art





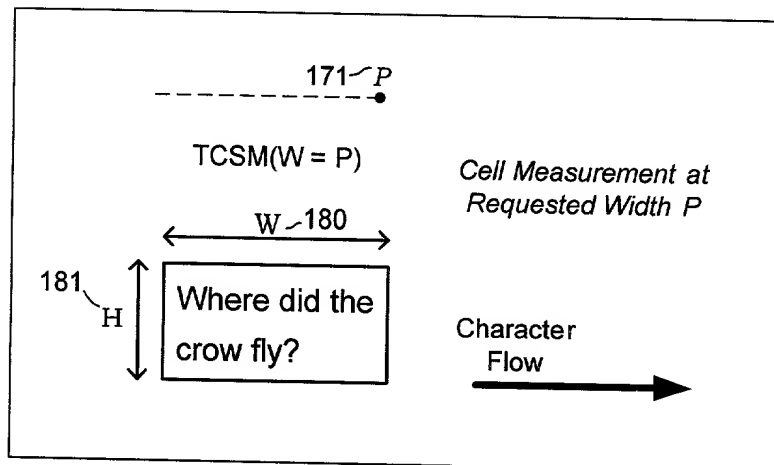


Fig. 1a.

Failed Maximum Table Cell Width Measurement

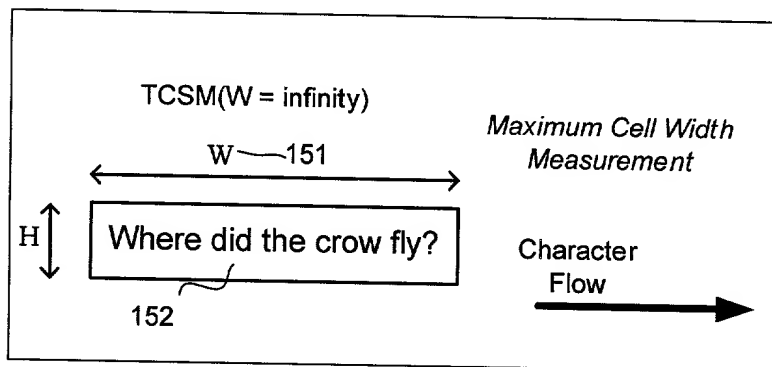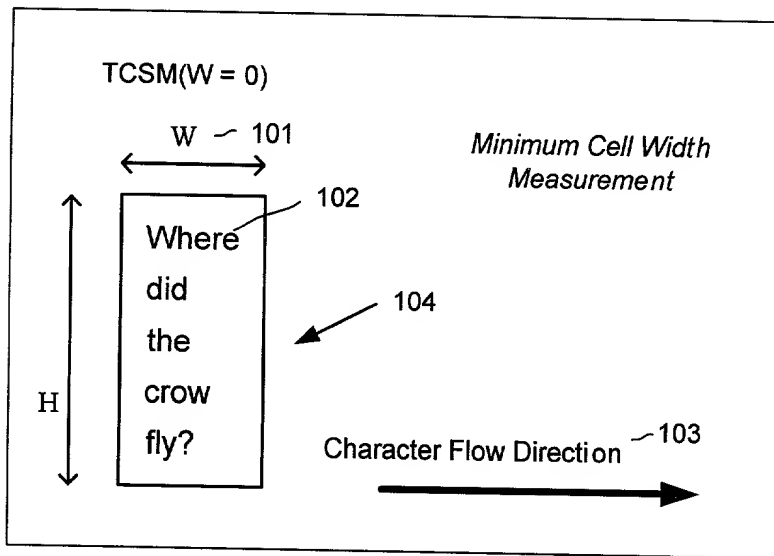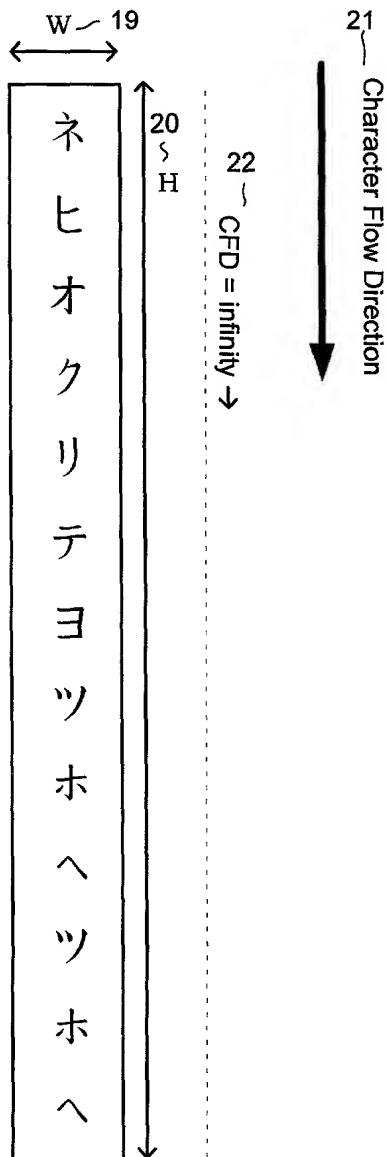

Failed Minimum Table Cell Width Measurement

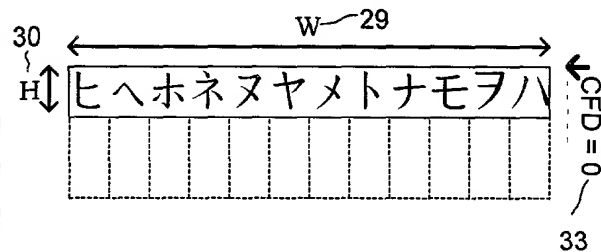

Failed Proposed Width P Measurement

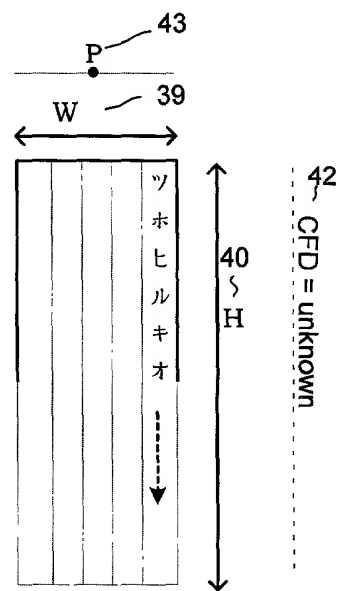


Fig. 2


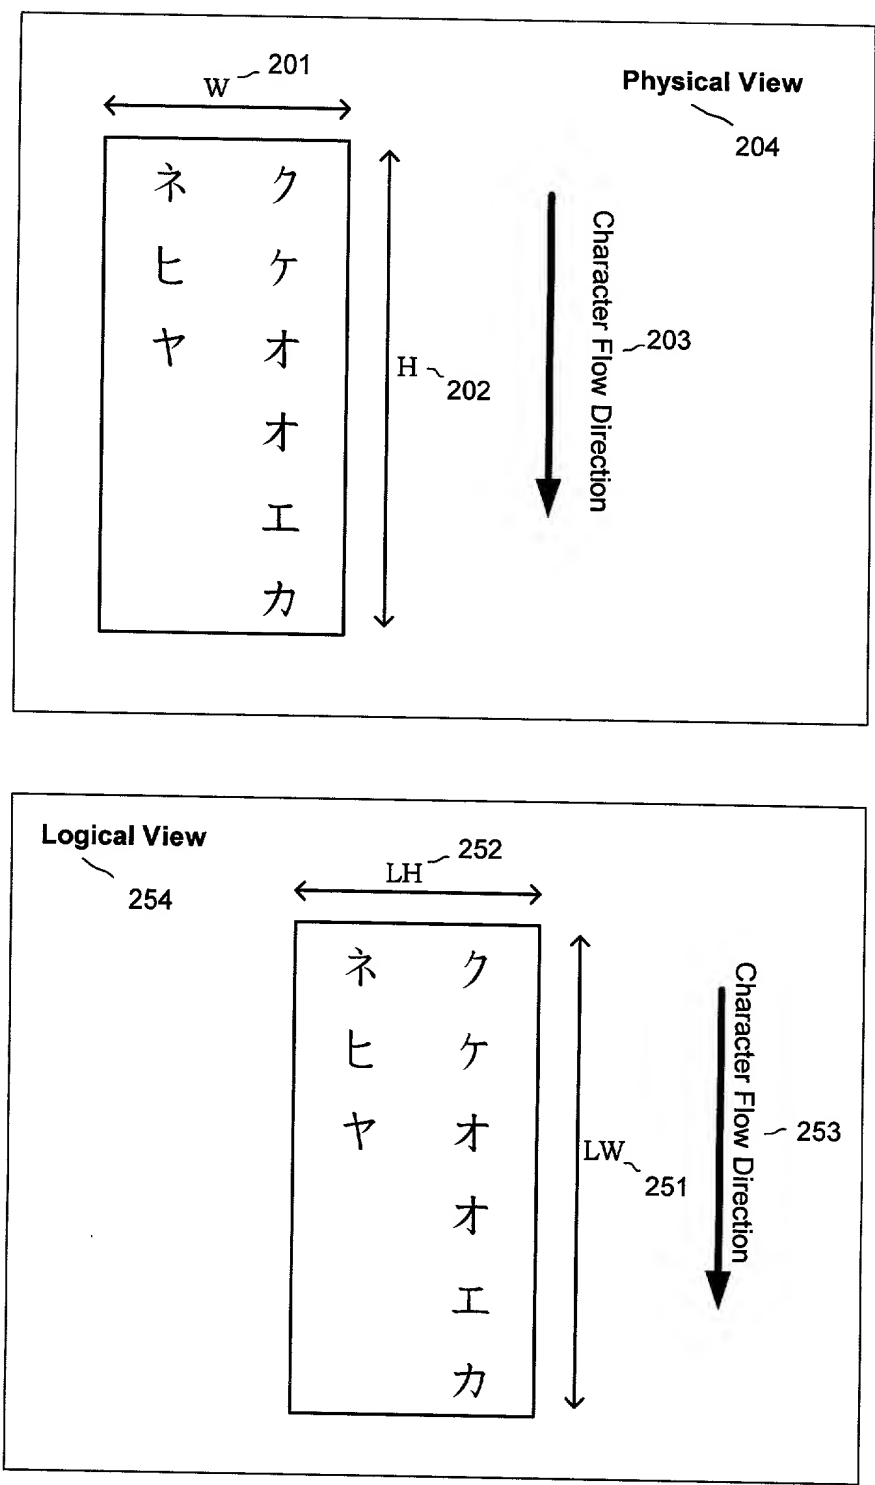


FIG. 3

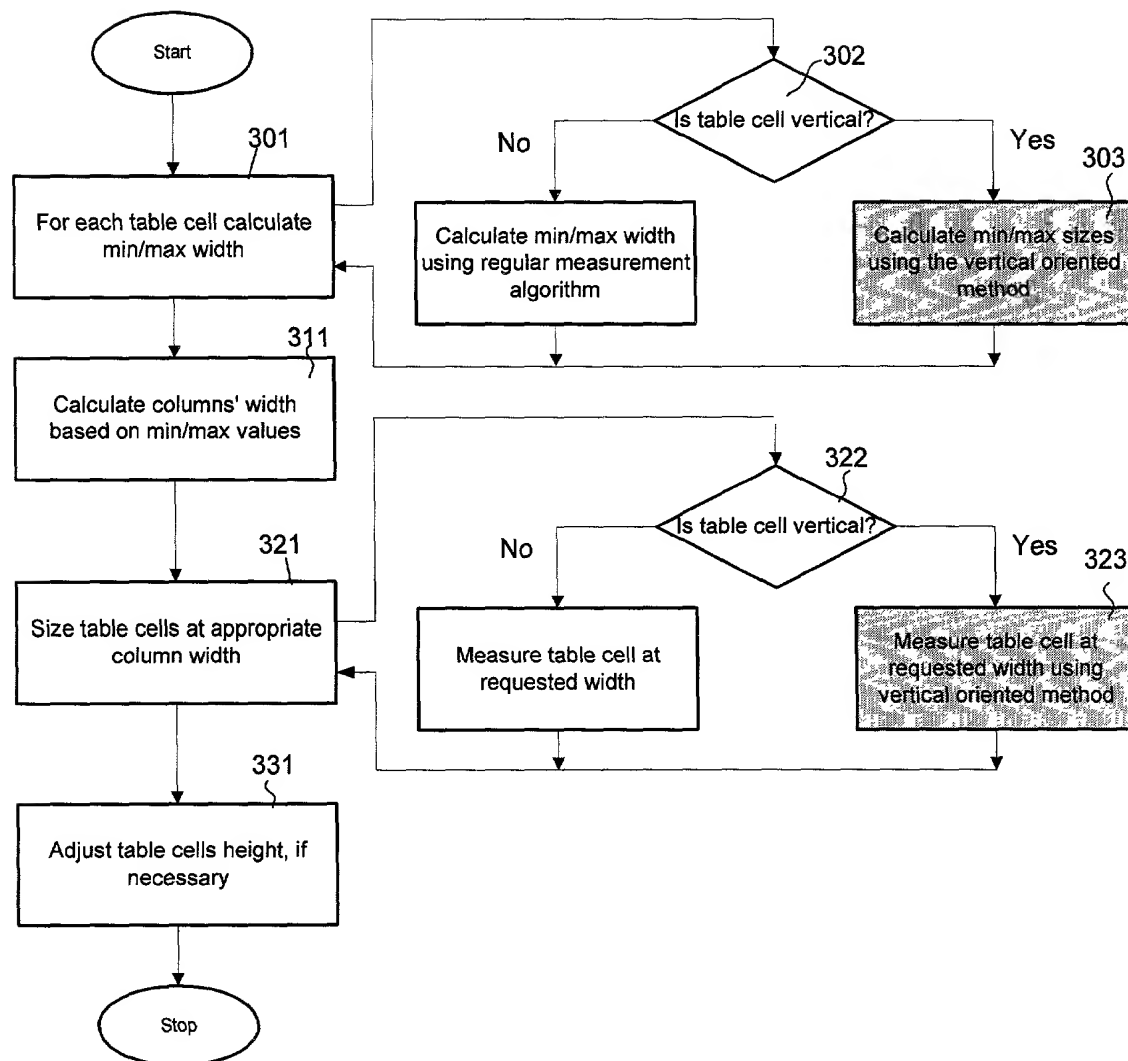

000000" 3420/960

Fig. 4

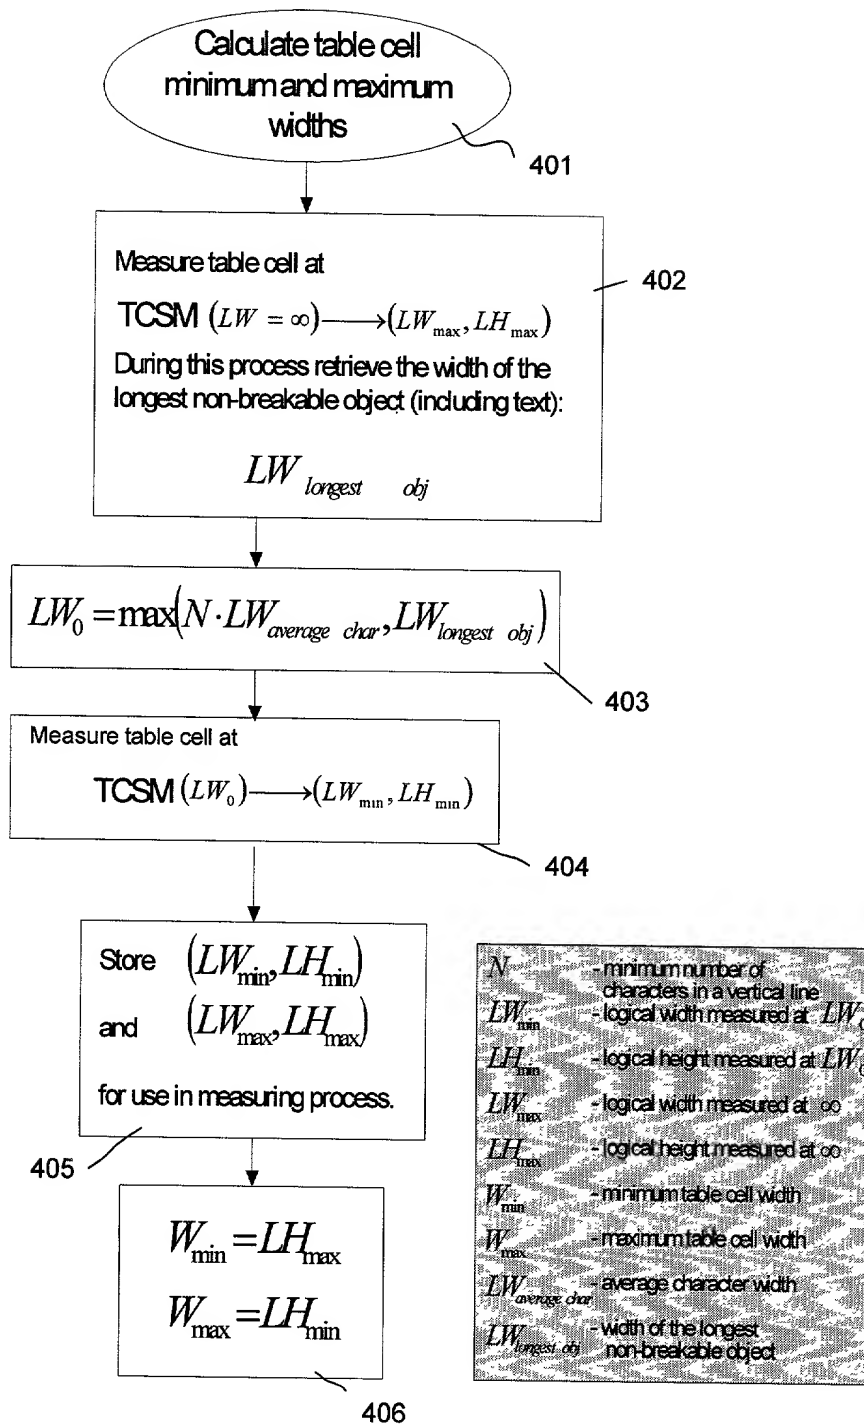


Fig. 5

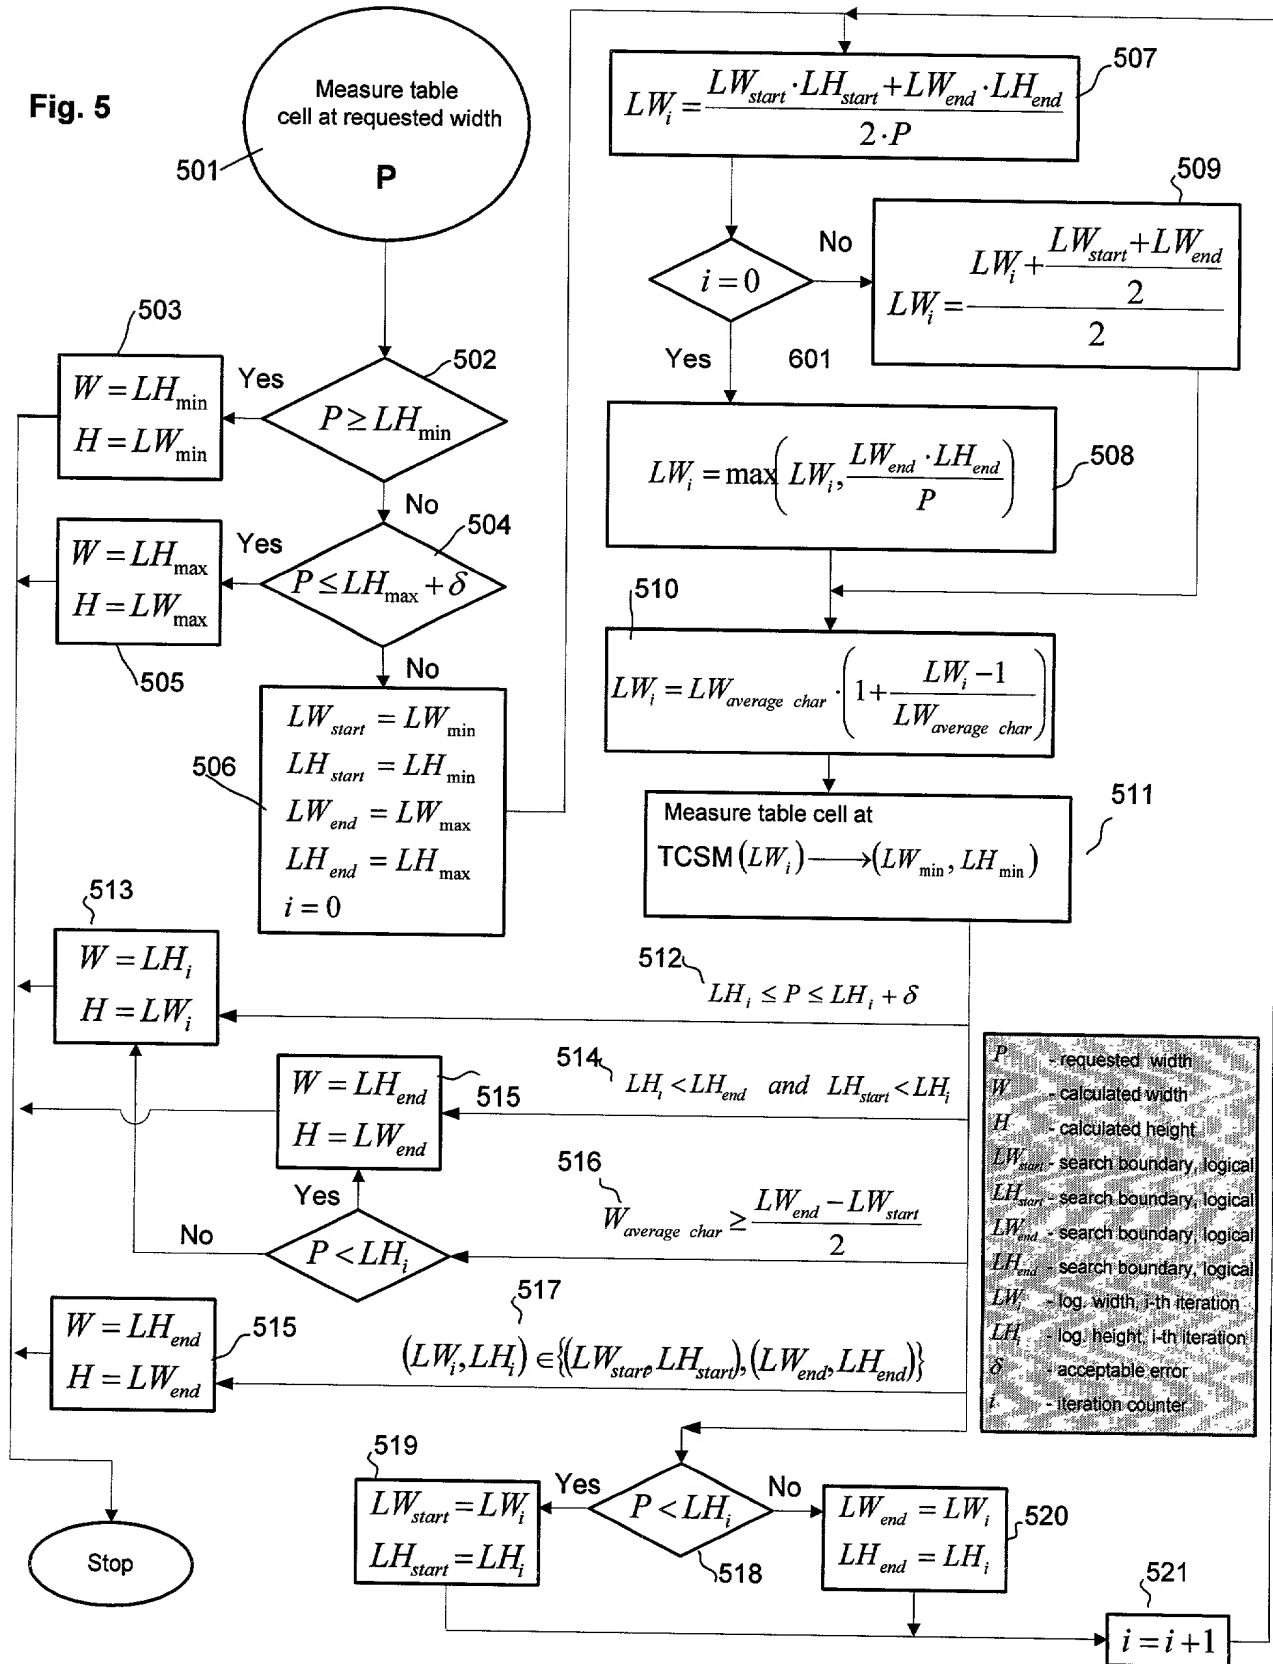


Fig. 6

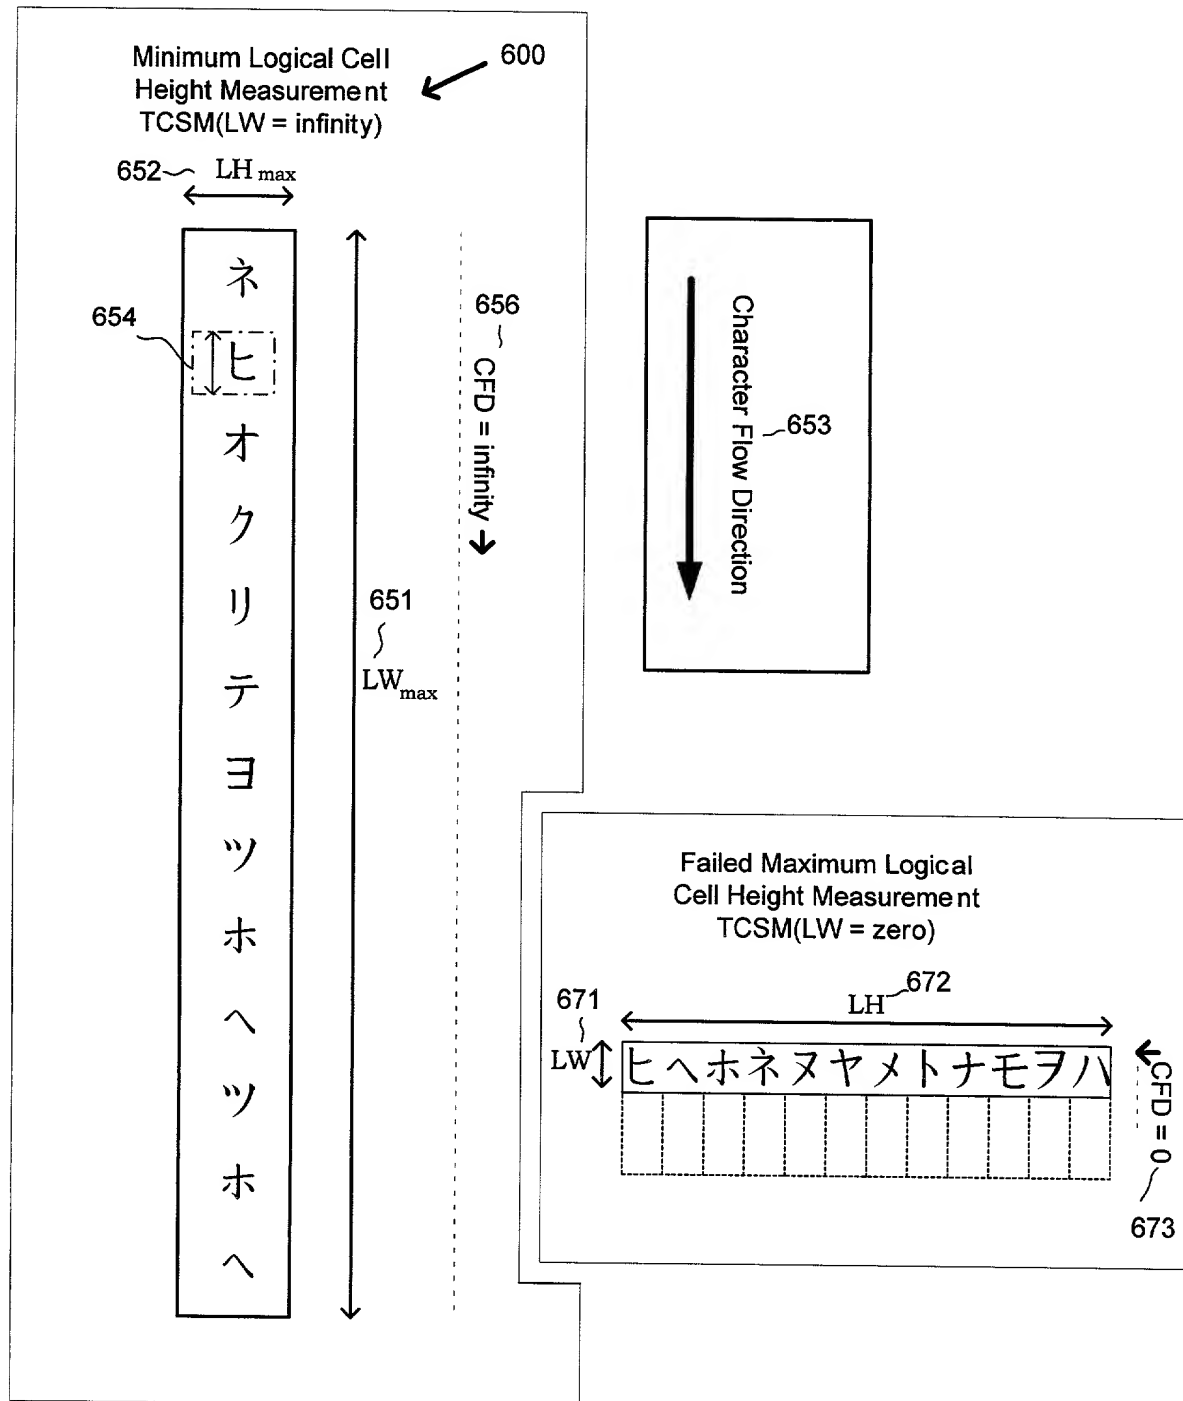


Fig. 7

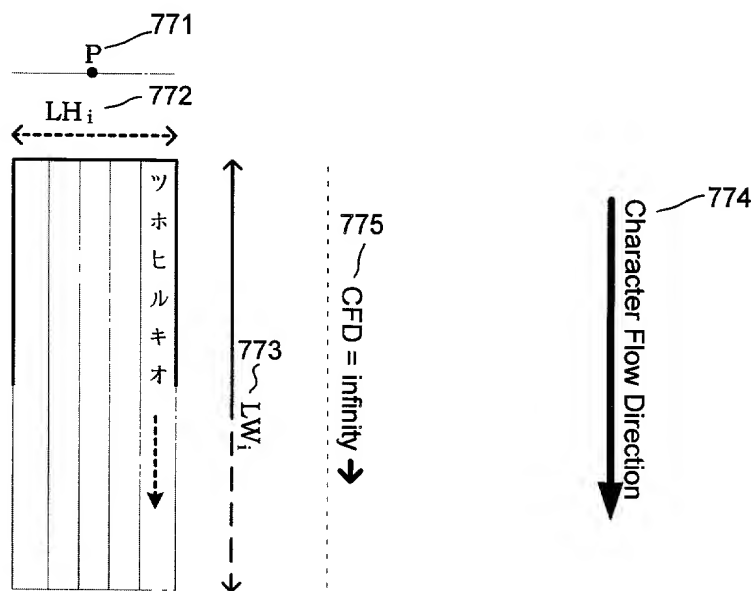
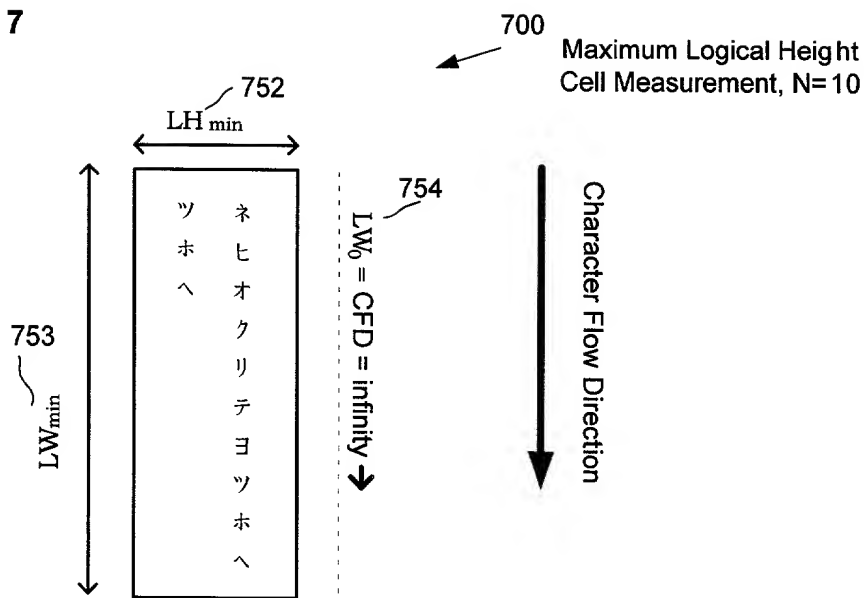


Fig. 8


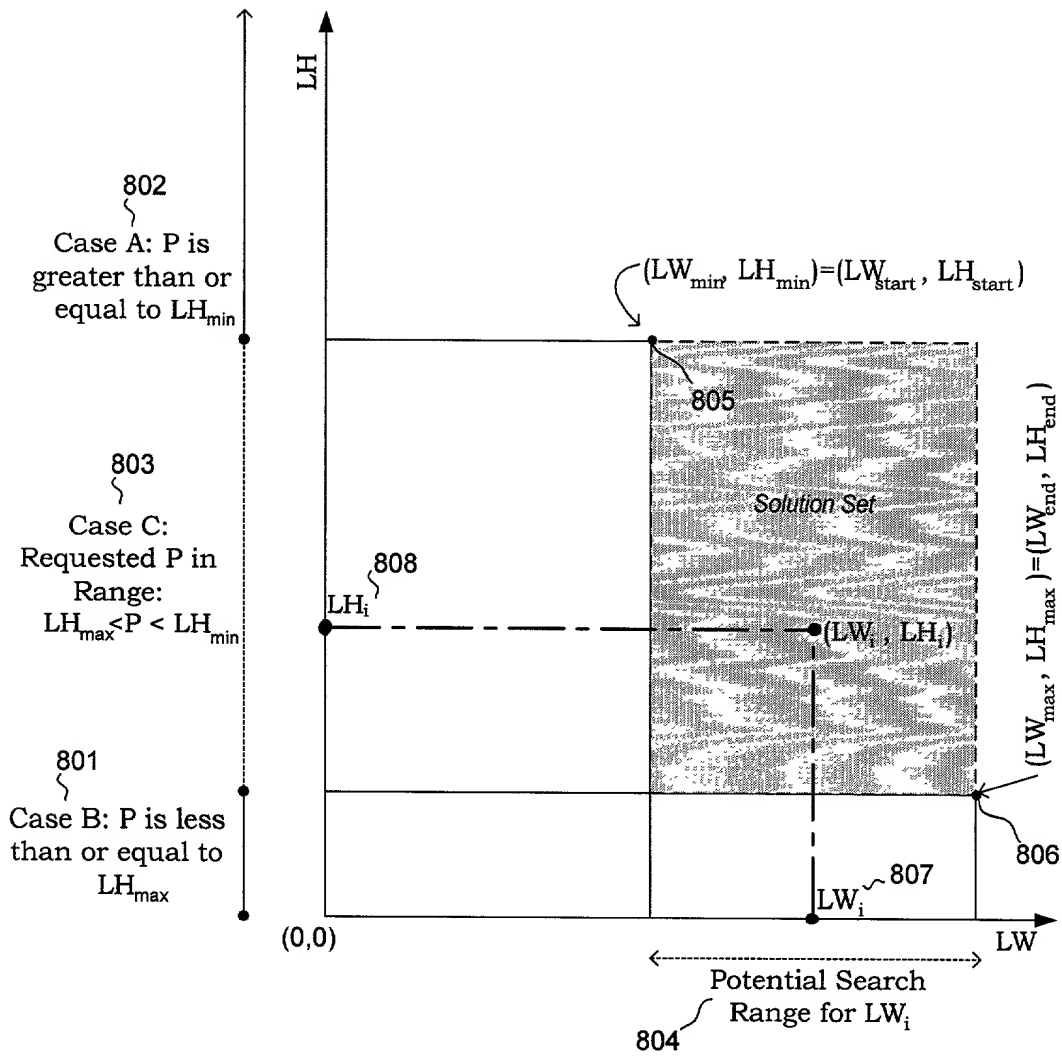


Fig. 9

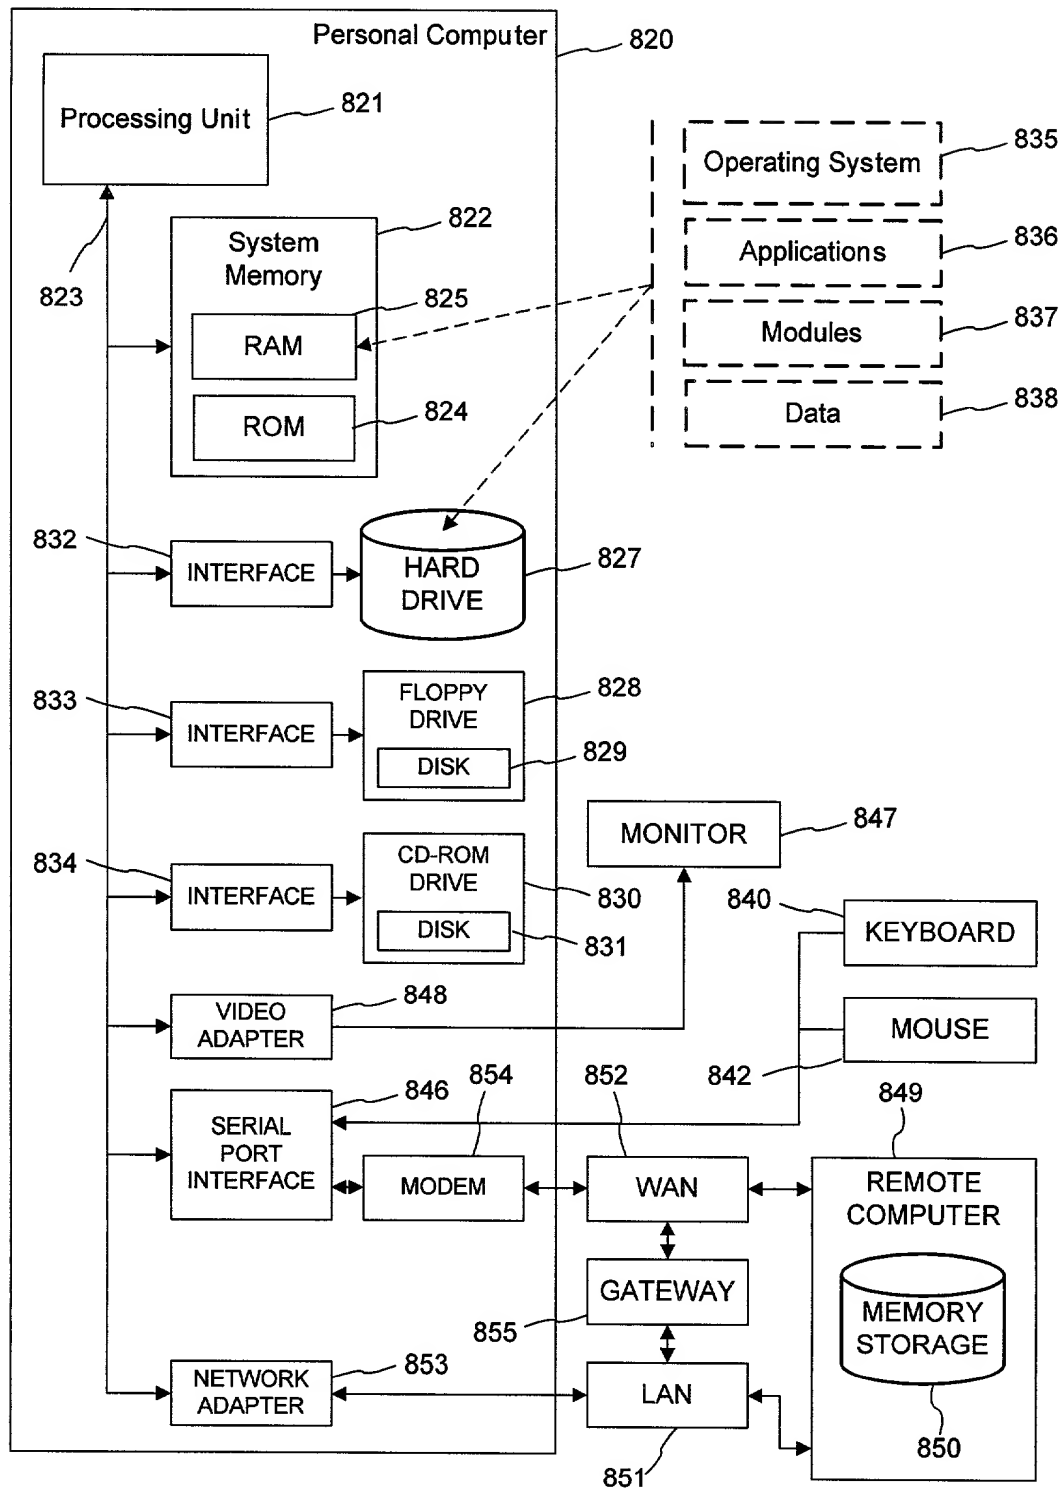

COMBINED DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled TABLE MEASUREMENT FOR VERTICAL TEXT, the specification of which

- ☒ is attached hereto.
- ☐ was filed on _____ as Application No. _____
- ☐ was described and claimed in PCT International Application No. _____, filed on _____, and as amended under PCT Article 19 on _____ (if applicable).
- ☐ and was amended on _____ (if applicable).
- ☐ with amendments through _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56. If this is a continuation-in-part application filed under the conditions specified in 35 U.S.C. § 120 which discloses and claims subject matter in addition to that disclosed in the prior copending application, I further acknowledge the duty to disclose material information as defined in 37 C.F.R. § 1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of the continuation-in-part application.

I hereby claim foreign priority benefits under Title 35, United States Code, § 119(a)-(d) of any foreign application(s) for patent or inventor's certificate or of any PCT International application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT International application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) on which priority is claimed:

Prior Foreign Application(s)

Priority
Claimed

_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	<input type="checkbox"/> Yes	<input type="checkbox"/> No
-------------------	--------------------	---------------------------------	---------------------------------	--------------------------------

003260" 34207360

I hereby claim the benefit under Title 35, United States Code, § 119(e) of any United States provisional application(s) listed below:

Application Number

Filing Date

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) or § 365(c) of any PCT International application(s) designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56(a) which occurred between the filing date of the prior application and the national or PCT International filing date of this application:

(Application No.)

(Filing Date)

(Status: patented,
Pending, abandoned)

The undersigned hereby authorizes the U.S. attorney or agent named herein to accept and follow instructions from _____ as to any action to be taken in the Patent and Trademark Office regarding this application without direct communication between the U.S. attorney or agent and the undersigned. In the event of a change in the persons from whom instructions may be taken, the U.S. attorney or agent named herein will be so notified by the undersigned.

I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application, to file a corresponding international application, and to transact all business in the Patent and Trademark Office connected therewith:

Name	Reg. No.	Name	Reg. No.
BECKER, Mark L.	31,325	ORR, David E.	44,988
CALDWELL, Lisa M.	41,653	PETERSEN, David P.	28,106
DeGRANDIS, Paula A.	43,581	POLLEY, Richard J.	28,107
GEORGE, Samuel E.	44,119	RINEHART, Kyle B.	P-47,027
GIRARD, Michael P.	38,467	SCOTTI, Robert F.	39,830
HARDING, Tanya M.	42,630	SIEGEL, Susan Alpert	43,121
JAKUBEK, Joseph T.	34,190	SLATER, Stacey C.	36,011
JONES, Michael D.	41,879	STEPHENS Jr., Donald L.	34,022
KLARQUIST, Kenneth S.	16,445	STUART, John W.	24,540
KLITZKE II, Ramon A.	30,188	VANDENBERG, John D.	31,312
LEIGH, James S.	20,434	WHINSTON, Arthur L.	19,155
MAURER, Gregory L.	43,781	WIGHT, Stephen A.	37,759
NOONAN, William D.	30,878	WINN, Garth A.	33,220
SAKO, Katie E.	32,628	CROUSE, Daniel D.	32,022

0092360" 91204960

Address all telephone calls to Stephen A. Wight at telephone number (503) 226-7391.

Address all correspondence to:

KLARQUIST SPARKMAN CAMPBELL
LEIGH & WHINSTON, LLP
One World Trade Center, Suite 1600
121 S.W. Salmon Street
Portland, OR 97204-2988

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole or First Inventor: Sujal S. Parikh

Inventor's Signature _____

Date

Residence: 15522, 134th Pl. NE
Woodinville WA 98072
Citizenship: India

Post Office Address:

Full Name of Second Inventor: Grzegorz A. Zygmunt

Inventor's Signature _____

Date

Residence: 3650 NE 144th Pl., Apt. N10
Bellevue WA 98007
Citizenship: Poland

Post Office Address:

009369-9120-960

Address all telephone calls to Stephen A. Wight at telephone number (503) 226-7391.

Address all correspondence to:

KLARQUIST SPARKMAN CAMPBELL
LEIGH & WHINSTON, LLP
One World Trade Center, Suite 1600
121 S.W. Salmon Street
Portland, OR 97204-2988

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole or First Inventor: Sujal S. Parikh

Inventor's Signature

Date

Residence: 15522, 134th Pl. NE
Woodinville WA 98072
Citizenship: India

Post Office Address:

Full Name of Second Inventor: Grzegorz A. Zygmunt

Inventor's Signature

Date

Residence: 3650 NE 144th Pl., Apt. N10
Bellevue WA 98007
Citizenship: Poland

Post Office Address:

009350 " 94202350